


Forming tap




CATALOGUE NUMBER: 2910

Forming tap, metric, DIN 2174, TiN coated, suitable for zinc alloys, structural steels, plain cast steels, free cutting steels, unalloyed aluminium and aluminium alloys with Si<10 %

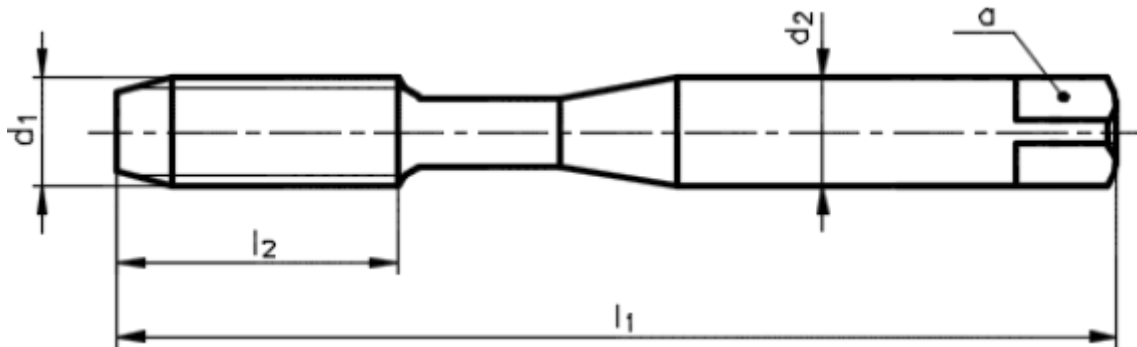


THREAD M
ISO Metric coarse thread



PROFILE SKETCH
60°



THREAD STANDARD
DIN13



TYPE N
Tap for steels up to 800 N/mm²



TAP MATERIAL
Super high speed steel



COATING
Titanium nitride coating




TAP STANDARD
DIN 2174





THREAD TOLERANCE
ISO 2 - 6HX



THREAD TOLERANCE
ISO 3 - 6GX



CHAMFER C
Length 2-3 pitch

**HOLE TYPE**Through hole (thread length $L > 1,5 \times d_1$)**HOLE TYPE**Blind hole (thread length $> 2,5 d_1$)

Select product model

ID	D1	P	Tolerance	l1	l2	d2	a	Price excl. VAT	Price incl. VAT
041535191030000	M3	0,5	6HX	56	11	3,5	2,7	21.75 EUR	26.32 EUR
041535191035000	M3,5	0,6	6HX	56	12	4	3	23.80 EUR	28.80 EUR
041535191040000	M4	0,7	6HX	63	13	4,5	3,4	22.25 EUR	26.92 EUR
041535191050000	M5	0,8	6HX	70	16	6	4,9	23.25 EUR	28.13 EUR
041535191060000	M6	1	6HX	80	19	6	4,9	24.75 EUR	29.95 EUR
041535191080000	M8	1,25	6HX	90	22	8	6,2	26.55 EUR	32.13 EUR
041535191100000	M10	1,5	6HX	100	24	10	8	33.65 EUR	40.72 EUR
041535191120000	M12	1,75	6HX	110	28	9	7	40.70 EUR	49.25 EUR
041535193030000	M3	0,5	6GX	56	11	3,5	2,7	21.75 EUR	26.32 EUR
041535193035000	M3,5	0,6	6GX	56	12	4	3	23.80 EUR	28.80 EUR
041535193040000	M4	0,7	6GX	63	13	4,5	3,4	22.25 EUR	26.92 EUR
041535193050000	M5	0,8	6GX	70	16	6	4,9	23.25 EUR	28.13 EUR
041535193060000	M6	1	6GX	80	19	6	4,9	24.75 EUR	29.95 EUR
041535193080000	M8	1,25	6GX	90	22	8	6,2	26.55 EUR	32.13 EUR
041535193100000	M10	1,5	6GX	100	24	10	8	33.65 EUR	40.72 EUR
041535193120000	M12	1,75	6GX	110	28	9	7	Ask for price	

Use

MACHINED MATERIAL	HOLE TYPE	CUTTING SPEED	LUBRICATION	USE
Aluminium alloys si content < 10%	blind hole (thread length $L < 1,5d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Aluminium alloys si content < 10%	blind hole (thread length $L > 2,5d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Aluminium alloys si content < 10%	through hole (thread length $L < 1,5d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Aluminium alloys si content < 10%	blind hole (thread length $L < 2d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Aluminium alloys si content < 10%	blind hole (thread length $< 1,5 d_1$, pilot drilling depth $\geq L+d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Aluminium alloys si content < 10%	blind hole (thread length $L < 2,5d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Aluminium alloys si content < 10%	through hole (thread length $L > 1,5d_1$)	15-30	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	through hole (thread length $L > 1,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	blind hole (thread length $L < 1,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	blind hole (thread length $L > 2,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	through hole (thread length $L < 1,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	blind hole (thread length $L < 2d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	blind hole (thread length $< 1,5 d_1$, pilot drilling depth $\geq L+d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Free cutting steels up to 800 N/mm ²	blind hole (thread length $L < 2,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels and heat-treated steels up to 800 N/mm ²	through hole (thread length $L < 1,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels and heat-treated steels up to 800 N/mm ²	blind hole (thread length $L < 2d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels and heat-treated steels up to 800 N/mm ²	blind hole (thread length $< 1,5 d_1$, pilot drilling depth $\geq L+d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels and heat-treated steels up to 800 N/mm ²	blind hole (thread length $L < 2,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels and heat-treated steels up to 800 N/mm ²	through hole (thread length $L > 1,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels and heat-treated steels up to 800 N/mm ²	blind hole (thread length $L < 1,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use

MACHINED MATERIAL	HOLE TYPE	CUTTING SPEED	LUBRICATION	USE
Structural steels and heat-treated steels up to 800 N/mm ²	blind hole (thread length $L > 2,5d_1$)	15-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	blind hole (thread length $< 1,5 d_1$, pilot drilling depth $\geq L+d_1$)	12-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	blind hole (thread length $L < 2,5d_1$)	12-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	through hole (thread length $L > 1,5d_1$)	12-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	blind hole (thread length $L < 1,5d_1$)	12-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	blind hole (thread length $L > 2,5d_1$)	12-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	through hole (thread length $L < 1,5d_1$)	12-20	Cutting Oil/Emulsion	Possible use
Structural steels up to 500 N/mm ²	blind hole (thread length $L < 2xd_1$)	12-20	Cutting Oil/Emulsion	Possible use
Unalloyed aluminium	blind hole (thread length $< 1,5 d_1$, pilot drilling depth $\geq L+d_1$)	15-35	Cutting Oil	Possible use
Unalloyed aluminium	blind hole (thread length $L < 2,5d_1$)	15-35	Cutting Oil	Possible use
Unalloyed aluminium	through hole (thread length $L > 1,5d_1$)	15-35	Cutting Oil	Possible use
Unalloyed aluminium	blind hole (thread length $L < 1,5d_1$)	15-35	Cutting Oil	Possible use
Unalloyed aluminium	blind hole (thread length $L > 2,5d_1$)	15-35	Cutting Oil	Possible use
Unalloyed aluminium	through hole (thread length $L < 1,5d_1$)	15-35	Cutting Oil	Possible use
Unalloyed aluminium	blind hole (thread length $L < 2xd_1$)	15-35	Cutting Oil	Possible use
Zinc and zinc alloys	blind hole (thread length $L < 2xd_1$)	15-20	Emulsion	Recommended use
Zinc and zinc alloys	blind hole (thread length $< 1,5 d_1$, pilot drilling depth $\geq L+d_1$)	15-20	Emulsion	Recommended use
Zinc and zinc alloys	blind hole (thread length $L < 2,5d_1$)	15-20	Emulsion	Recommended use
Zinc and zinc alloys	through hole (thread length $L > 1,5d_1$)	15-20	Emulsion	Recommended use
Zinc and zinc alloys	blind hole (thread length $L < 1,5d_1$)	15-20	Emulsion	Recommended use

MACHINED MATERIAL	HOLE TYPE	CUTTING SPEED	LUBRICATION	USE
Zinc and zinc alloys	blind hole (thread length $L > 2,5 \times d_1$)	15-20	Emulsion	Recommended use
Zinc and zinc alloys	through hole (thread length $L < 1,5 \times d_1$)	15-20	Emulsion	Recommended use

NAREX Ždánice, spol. s r.o.

Městečko 250
696 32 Ždánice, Česká republika

Tel.: +420 518 607 111
Fax: +420 518 607 153
E-mail: sales@narexzd.cz
Web: www.narexzd.cz